


AIPHONE®


JP Series

Video Intercom with Enhanced Picture Quality

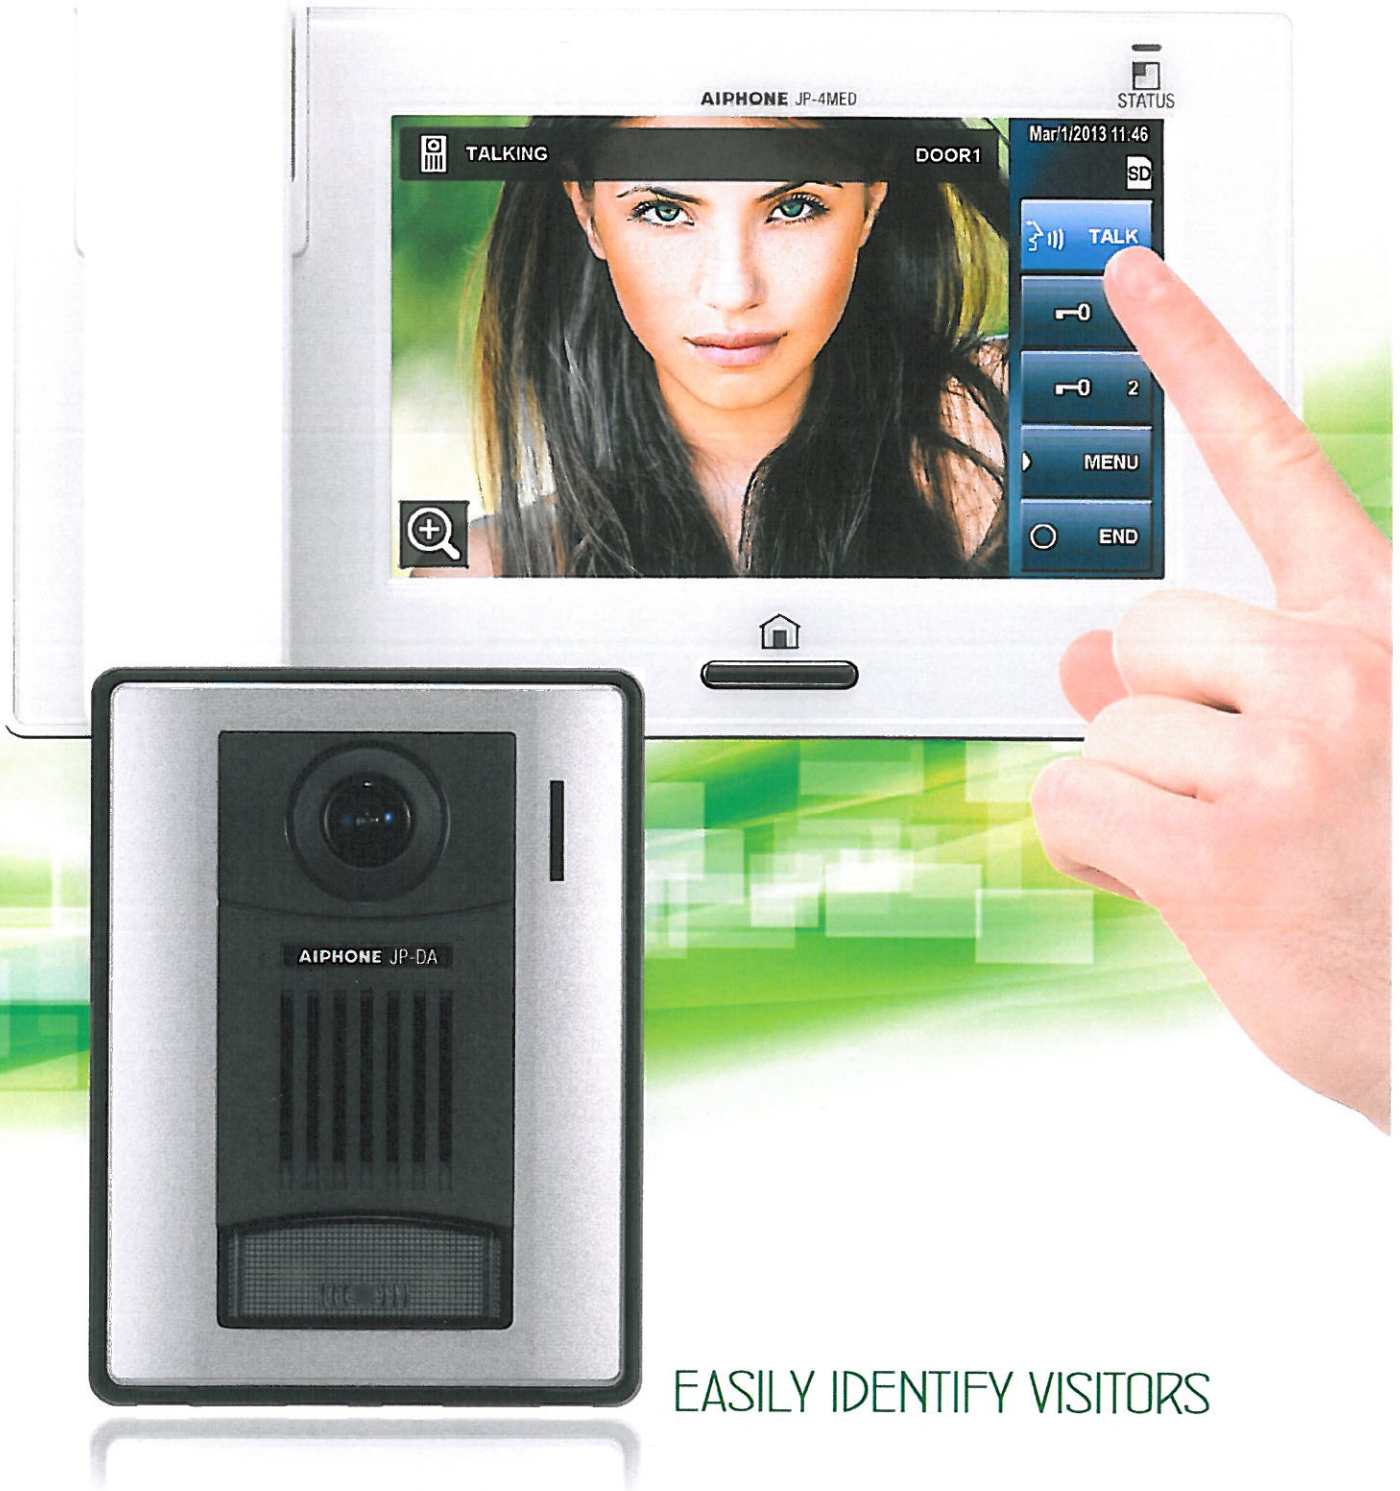

EASILY IDENTIFY VISITORS


JP Series Video Intercom with Enhanced Picture Quality

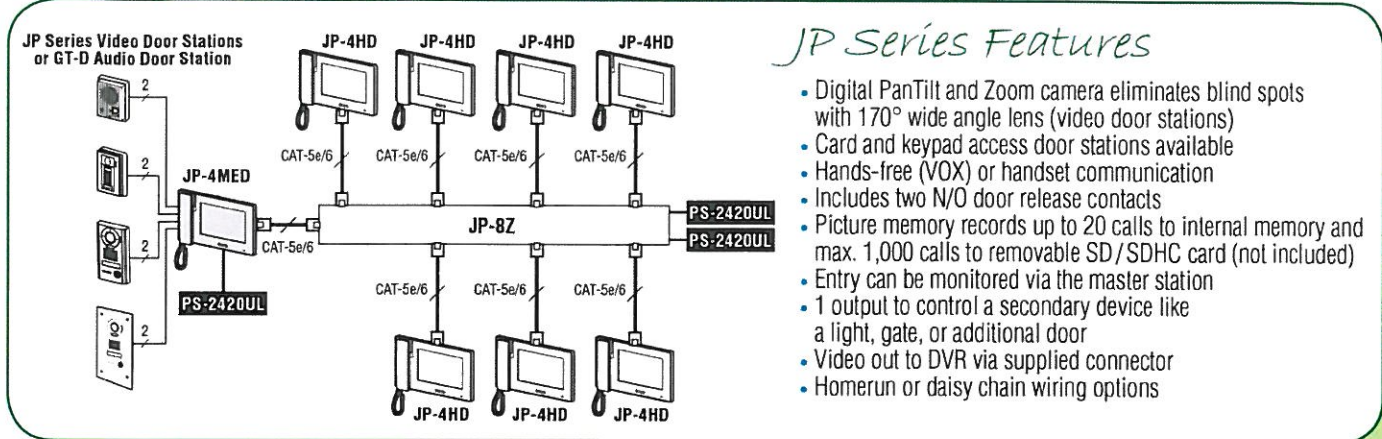


JP Series Features

- Digital PanTilt and Zoom camera eliminates blind spots with 170° wide angle lens (video door stations)
- Card and keypad access door stations available
- Hands-free (VOX) or handset communication
- Includes two N/O door release contacts
- Picture memory records up to 20 calls to internal memory and max. 1,000 calls to removable SD/SDHC card (not included)
- Entry can be monitored via the master station
- 1 output to control a secondary device like a light, gate, or additional door
- Video out to DVR via supplied connector
- Homerun or daisy chain wiring options


Start Here! Select one box set



JPS-4AED
JP-4MED, JP-DA, PS-2420UL




JPS-4AEV
JP-4MED, JP-DV, PS-2420UL




JPS-4AEF
JP-4MED, JP-DVF, PS-2420UL

Add more inside stations (Up to 7 JP-4HD stations) *Add more door stations (Up to 4 TOTAL per system)*




JP-4HD
Video Sub Master Station
(Up to 7 per JP-4MED)

- 7" Touchscreen LCD
- Hands-free communication with handset for privacy
- Homerun with Cat-5e/6




JP-8Z
Distribution Adaptor for Sub Master Stations




JP-DA
Video Door Station

- PTZ camera
- Plastic cover
- Surface mount




JP-DV
Video Door Station

- PTZ camera
- Zinc die cast
- Surface mount



JP-DVF
Video Door Station

- PTZ camera
- Stainless steel
- Flush mount
- Mounting box included



GT-D
Audio Door Station

- Plastic cover
- Surface mount

JP Series Specifications

<p>Power Source 24V DC – use PS-2420UL</p> <p>Communication Hands-free (VOX) or handset (full-duplex)</p> <p>Video Display 7" color LCD touchscreen</p> <p>Picture Memory Internal/Built-In: record max. 20 calls (6 images per call) with up to 5 calls protected from overwriting SD/SDHC card: record max. 1,000 calls (40 images per call) with up to 100 calls protected from overwriting</p> <p>Camera Type: 1/4" color CMOS View Area: 100° vert. x 170° horiz.</p> <p>Door Release N/O dry contact, 24V AC/DC, 500mA – use EL-12S (use RY-24L for larger contact rating and use RY-3DL for 3-4 doors)</p>	<p>Wire Type Door Station to Master Station: 2-cond., mid cap, solid, non-shielded – use Aiphone #871802 Power Supply to Master Station: 2-cond., mid cap, solid, non-shielded – use Aiphone #871802 Master Station to Adaptor: CAT-5e or CAT-6 Adaptor to Sub Master Station: CAT-5e or CAT-6</p> <p>Distance Door Station to Master Station: 330' Master Station to Distribution Adaptor: 650' Distribution Adaptor to Sub Master Station: 165' Power Supply to Master Station: 16'(22AWG) 33'(18AWG) Power Supply to Distribution Adaptor: 16'(22AWG) 33'(18AWG)</p>
---	--

seadan security & electronics 

You're in very secure company

celebrating **25+** Years

1300 366 851 | seadan@seadan.com.au | www.seadan.com.au

VIC Unit 7, 170 Forster Road, Mt Waverley VIC 3149
NSW Unit 5, 142 James Ruse Drive, Parramatta NSW 2150
QLD 15-19 Hudson Road, Albion QLD 4010
WA Unit 4, 200 Balcatta Road, Balcatta WA 6021
ACT Unit 2, 157-161 Gladstone Street, Fyshwick ACT 2609